


AirCheck® G3

Quick Start Guide



AirCheck G3 is a comprehensive, hand-held tool for testing and troubleshooting the latest wireless network technology. The AirCheck G3 operates on 802.11a/b/g/n/ac/ax networks in the 2.4 GHz, 5 GHz, and 6 GHz bands. It features applications from our AllyWare™ Common Technology platform for Wi-Fi device discovery and network analysis.

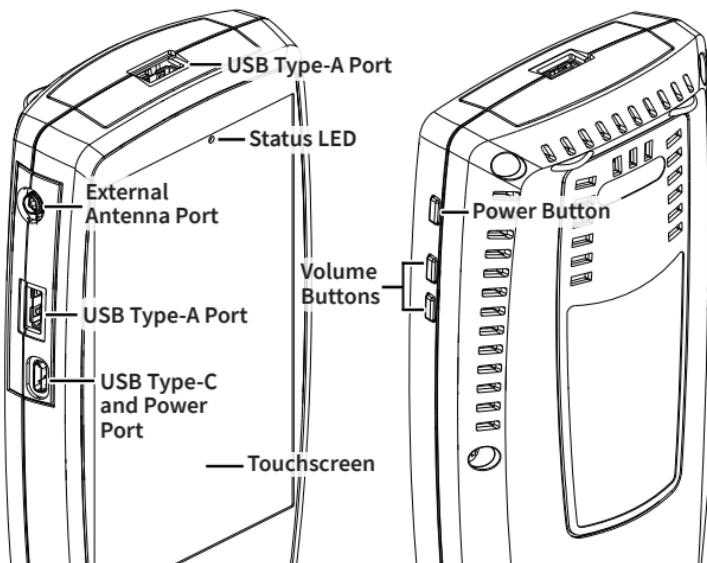

AutoTest

Verify your network layers 1 through 7 in seconds.



EZ Wi-Fi

Quickly connect and view Wi-Fi results on a simplified interface.



Discovery

Identify and analyze devices on your network.



Wi-Fi

Identify APs, SSIDs, clients, and channels from your location.



AirMapper™

Perform Wi-Fi site surveys and generate heat maps in Link-Live.



Spectrum

Display signal and noise graphs in real time with a Spectrum Analyzer.



iPerf

Measure network throughput to an iPerf server.



Path Analysis

Trace Layer 2 and 3 routes from your tester to a URL or IP address.



PING TCP

Validate and monitor responsiveness and connectivity.



Capture

Capture network traffic with intuitive filters.



App Store

Download and install 3rd-party applications.



Link-Live™

Upload, manage, analyze, and report results and data.

Getting Started

1. Plug the included power adapter into the USB-C port. Charge for about 3 hours.
The status LED stays solid once the unit is fully charged.
2. Power on the AirCheck G3 by holding the power button down for a full second.
The Discovery and Wi-Fi apps begin collecting any available Wi-Fi data in the background.
3. Register your new tester at support.netally.com/registration.
4. Open the **EZ Wi-Fi** app from the Home screen.
5. Tap the blue link to select a discovered SSID and enter its password.
6. Tap START to initiate the test steps and connect. The screen updates as test steps complete.

Customizing Tests

For more control over test types and configuration, open **AutoTest** from the Home screen to create and edit test Profiles. An AutoTest Profile is a series of tests saved with your chosen connection and threshold settings. After running a profile, tap the individual test cards to view more details, retest, or open other NetAlly apps for further analysis.

- Tap the Menu  or Settings buttons  to configure apps and tests.
- Tap the floating action button  to add tests or navigate to other apps.

Navigating the Interface

The AirCheck G3 touchscreen supports operations typical of any smart device. Tap, drag, and swipe to navigate through apps, open side menus, pull down the notification panel from the top, and pull up the Apps screen from the bottom of the Home screen.

The main navigation buttons are always shown at the bottom of the touchscreen:

-  The back icon returns to the previous screen.
-  The circle icon opens the Home screen.
-  The square icon displays your recently used applications.

Connecting to Link-Live

The Link-Live platform (cloud-based or on-premise) stores test results and other data for analysis, reporting, and documentation. By default, test data is automatically uploaded to Link-Live once your AirCheck G3 is **claimed**.

1. To start, create a user account at Link-Live.com, and sign in.
2. On first sign-in, a pop-up window prompts you to claim a device.
If you have claimed devices, go to the **Units** page, and select the **Claim Unit**  button at the lower right corner of the page.
3. On your AirCheck G3 Home screen, open the **Link-Live** app, and tap **CLAIM NOW**.
4. To learn more about Link-Live and view video tutorials, open **Support** from the left-side navigation drawer on the website.

More Information

Customer Support: netally.com/support

User Guide: netally.com/user-guides/aircheckg3

