


LinkRunner® 100G

Quick Start Guide



The LinkRunner® 100G is a professional-grade performance and precision tool network engineers need to troubleshoot and upgrade critical 100G fiber links. It features applications from our third-generation common software platform for high-speed wired network discovery, measurement, validation, and reporting.

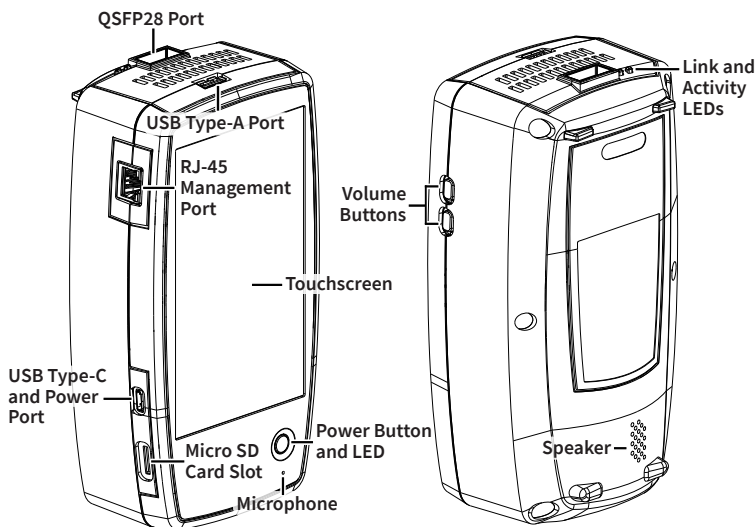

AutoTest

Verify your network layers 1 through 7 in seconds.



EZ Wired

Quickly connect and view wired results on a simplified interface.



Ping/TCP

Validate and monitor responsiveness and connectivity.



QSFP Insights

Examine QSFP28 link capabilities, module health, and lane optics.



Discovery

Identify and analyze devices on your network.



Path Analysis

Trace Layer 2 and 3 routes from your tester to a URL or IP address.



Performance

Measure up to 100G line rate with multiple streams.



Link-Live™

Upload, manage, analyze, and report results and data.



App Store

Download and install 3rd-party applications.

View the **User Guide** and videos from your LinkRunner 100G Home screen.



Getting Started

1. **Charge** for about 3 hours by plugging in the included power adapter at the USB-C port.
2. **Hold down** the power button on your LinkRunner 100G for **one full second** to turn it on.
3. **Follow the on-screen prompts** to make required startup selections.
4. **Activate and claim** to Link-Live.com using the easy guided process on your unit:
 - Scan the QR code that pop-ups on the tester's screen with another device; the MAC address for your unit auto-populates into the claiming form on Link-Live.com.
 - If you cannot use the code, go to link-live.com/units/claim. On-screen instructions guide you through claiming and activating your product.
5. To begin testing, **insert a QSFP28 module** or SFP adapter into the QSFP28 test port.
6. **Connect** to an active network switch.
7. Open the **EZ Wired** app and tap **START** to connect and view test results.

Navigating the Interface

Tap, drag, and swipe to navigate through apps, open side menus, pull down the notification panel from the top, and pull up the Apps screen from the bottom of the Home screen.

The main navigation buttons are always shown at the bottom of the touchscreen:


-  **Back:** Return to the previous screen.
-  **Home:** Go to the Home screen.
-  **Recent:** View your recently used applications.

Customizing Tests

Open **AutoTest** from the Home screen to build and edit test Profiles.

A **Profile** is a series of tests and measurements, configured and saved with your connection and threshold settings. Tap an individual test card to view more details and actions.

-  **Menu:** Access multiple test modes and settings.
-  **Settings:** Configure the current test or profile.
-  **Action:** Add more tests or navigate to other apps.

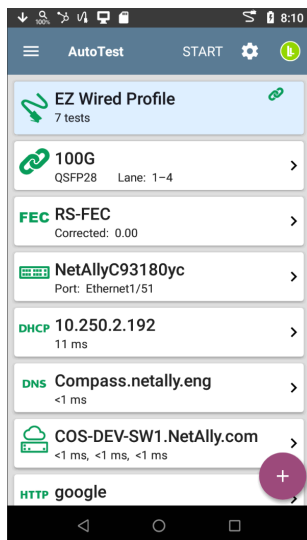

Connecting to Link-Live

The Link-Live platform stores test results and other data for analysis, reporting, and documentation. By default, test data is automatically uploaded to Link-Live once your LinkRunner 100G is **claimed**.

To start, create a user account at [Link-Live.com](https://link-live.com), and sign in. On first sign-in, a pop-up window prompts with steps to claim a device and create an organization.

More Information

Customer Support: netally.com/support

User Guide: netally.com/user-guides/linkrunner100g



PN 770-000071
For software v3.1
© 2026 NetAlly, LLC